


CP- UNC-TD20L8-VMD**2 MP Full HD IR Bullet Camera - 80Mtr.****Main Features**

- 1/2.7" 2Megapixel PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 3.6mm fixed lens (6mm optional)
- IR Range of 80 Mtrs, IP67, PoE
- 1/1 Alarm in/out, 1/1 audio in/out
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

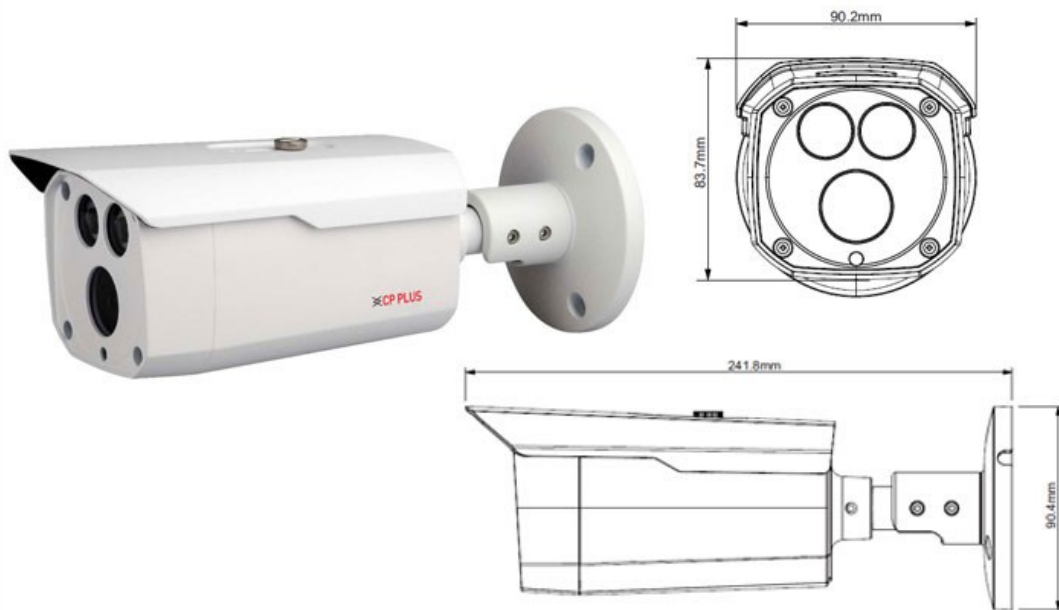

CP- UNC-TD20L8-VMD

2 MP Full HD IR Bullet Camera - 80Mtr.



Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Gain Control(AGC)
 Lens
 S/N Ratio
 Back Light Compensation
 Video Streaming
 Resolution
 Privacy Mask
 ICR
 Audio Input
 Audio Compression
 Audio Output
 Alarm IN
 Alarm Out
 WDR
 Protocol
 Smart Detection
 Ethernet
 User Account
 Smart Phone
 IR
 Micro SD
 Operating Temperature
 Power Source
 Power Consumption
 Weatherproof Standard

Specification

1/2.7" 2Megapixel progressive scan CMOS
 0.01Lux/F2.0(Color), 0Lux/F2.0(IR on)
 Auto/Manual, 1/3(4)~1/10000s
 Auto/Sunny/Night/Outdoor/Customized
 Auto/Manual
 6mm
 More than 50dB
 BLC / HLC / WDR(120dB)
 Main Stream: 1080P/720P(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~13/4fps)
 1080P(1920× 1080)/ 720P(1280× 720) / D1(704× 576/704× 480)/ CIF(352× 288/352× 240)
 Up to 4 areas
 Auto(ICR)/Color/B/W
 1 channel
 G.711a/ G.711u/ AAC
 1 channel
 1 channel
 1 channel
 Yes
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
 Tripwire, Intrusion, Scene Change, Face detect
 RJ-45 (10/100Base-T)
 20 Users
 iPhone, iPad, Android, Windows Phone
 IR Range of 80 Mtr.
 Micro SD Max 128GB
 -40°C~+60°C, Less than 95% RH
 DC12V, PoE (802.3af)
 Max 3.7W
 IP67



 **CP- UNC-TD20L8-VMD****2 MP Full HD IR Bullet Camera - 80Mtr.****Feature**

Dimension

Weight

Specification

Φ90.4mm×241.8mm

0.61Kg(with package 0.80kg)